




Base made of S-235-JR galvanised steel and cast iron textured polyurethane coating.
Shaft made of wood treated with a fungicide, insecticide and waterproof product. Internally reinforced with a 60mm galvanised square tube.
Thickness (base, shaft): 4mm. * Bracket made of galvanised steel, microtextured black colour finish.

** Installation note: to ensure the bracket is properly angled, cement the bolts at 45° with regard to the direction of the street.*

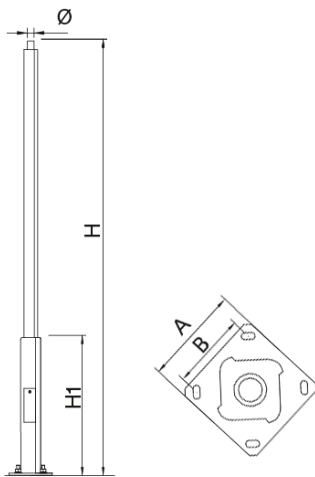

Ref.	H	H1	H2	C	Ø	A	B			
ICFU38A	3800	1210	-	-	60	300	200	M18x500	x	-
ICFU601A	6000	1210	5770	750	-	300	200	M18x500	-	x

[CAD](#) | [Catalogue](#) | [HD image](#)



ILDL



ILGL



ILRE



ICFU601A



The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.