




RC30

RC50

RC15

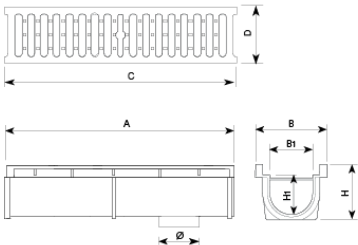

Designed to withstand medium traffic. Perfect for installation on roads with an ADT of 1,000-20,000, and in particular on road carriageways (including pedestrian streets), stabilised kerbstones and parking areas for all types of vehicles.

Complies with European standard EN-1433.
Metal non-slip surface.
Includes fixing system between the channel and the grate.
Coated with non-toxic, non-flammable and environmentally safe black paint.
IMPORTANT:
It is imperative to level the channels during their installation and Base like the side walls, a defective installation cancels all guarantee.

| REF. | | A | B | H1 | C | D |
|------|------|-----|-----|-----|-----|-----|
| RC15 | D400 | 750 | 145 | 70 | 750 | 125 |
| RC20 | D400 | 750 | 230 | 120 | 750 | 195 |
| RC30 | D400 | 750 | 335 | 150 | 750 | 300 |

[Project sheet](#) | [CAD](#) | [HD image](#)

The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.