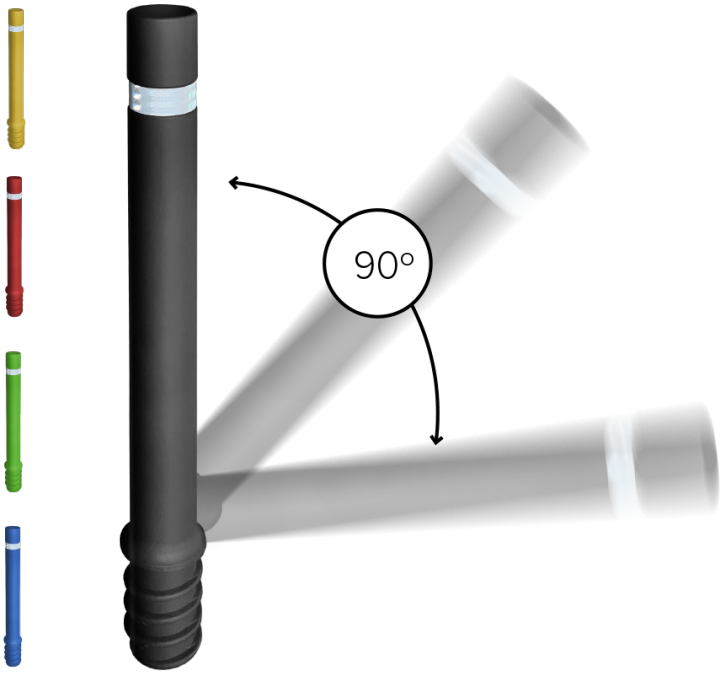


HFLEX


Flex bollard

- Flexible

Black
Color

ISO 9001 ISO 50001 ISO 14001 ISO 45001

FLEX design mobile bollard, made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective strip.
It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. It is also available with a pedestal for bolted installation. It can withstand 1,500 bending cycles at 45° and 50 cycles at 90° without damage. It has an "E" fire rating, according to UNE-EN 13501-1:2007+A1:2010.
Resistant to -50º according to UNE ISO 812 standard.
Recommended anchoring: By embedding.



Ref.	Ø A	H	H1
Hflex	100	1000	190


V. 2025-09-29 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

+49 (0) 521 450 131-2 | mb@bas-mobiliar.de


Flex bollard **-**
Flexible

HFLEX


- Flexible con Peana
HFLEXP



- Flexible luminosa con LED solar
HFLEXLEDSOL



- Móvil Flexible base inox
HFLEXMI



- Móvil Flexible base poliuretano
HFLEXMP



V. 2025-09-29 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.