


# Flexible con LED y Peana

HFLEXLEDP

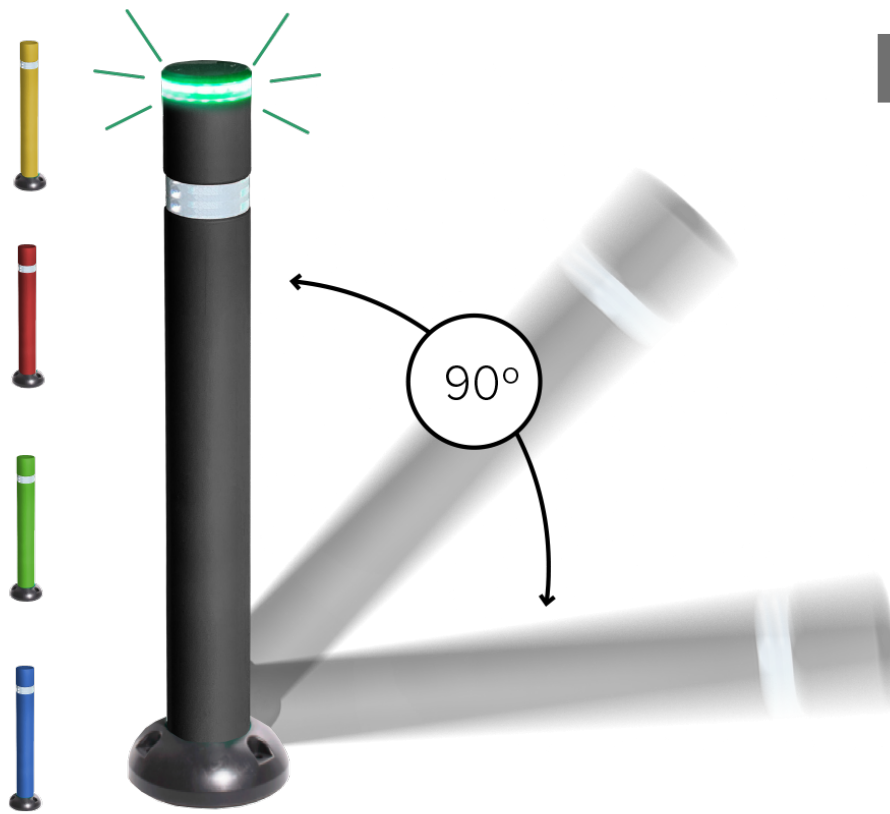


LED bollard made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective band. Designed with a base for screw mounting.

It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. A version with a pedestal for bolted installation is also available. It withstands 1500 bending cycles at 45° and 50 cycles at 90° without damage. It has a fire performance rating of "E" according to UNE-EN 13501-1:2007+A1:2010.

Resistant to -50° according to UNE ISO 812 standard.

Recommended anchoring: Three Ø10 x 120mm bolts depending on the paving



Ref.	Ø A	H	H1
HflexLEDP	100	850	Ø195



Recommended anchoring: by means of three Ø10 x 120mm bolts depending on the surface.

Optional:

- Other colours: red, green, yellow or blue.