



Móvil Flexible con LED solar y base polietileno

HFLEXLEDSOLMP

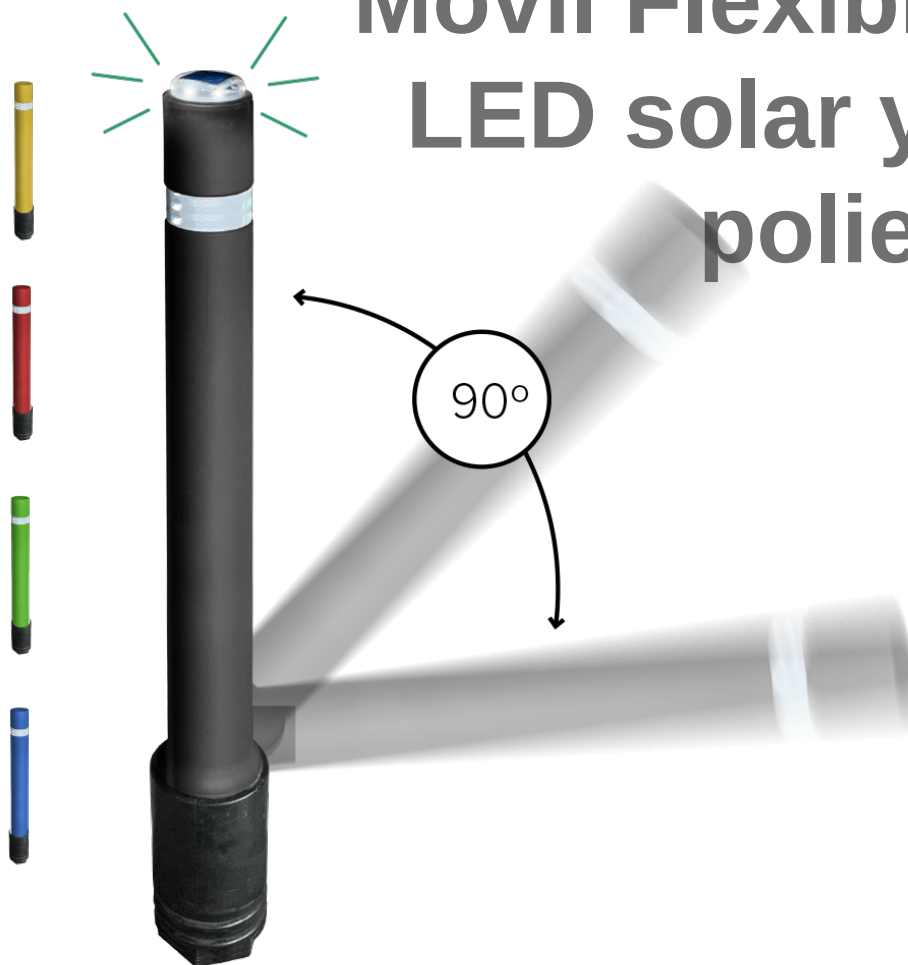

Solar mobile bollard with LED lights, made of flexible polyurethane in black (optional in red, green, yellow or blue), UV resistant, with a reflective band. Recessed base in black polyethylene.

It is manufactured in fixed or mobile versions with polyurethane or stainless steel bases. A version with a pedestal for bolted installation is also available. It withstands 1500 bending cycles at 45° and 50 cycles at 90° without damage. It has a fire performance rating of "E" according to UNE-EN 13501-1:2007+A1:2010.



Ref.	Ø A	H	H1
HflexLEDsolMp	100	1050	210



Resistant to -50° according to UNE ISO 812 standard.

Recommended anchoring: By embedding the base.