
BAS-MOBILIAR


IBERDROLA

IBM2T2



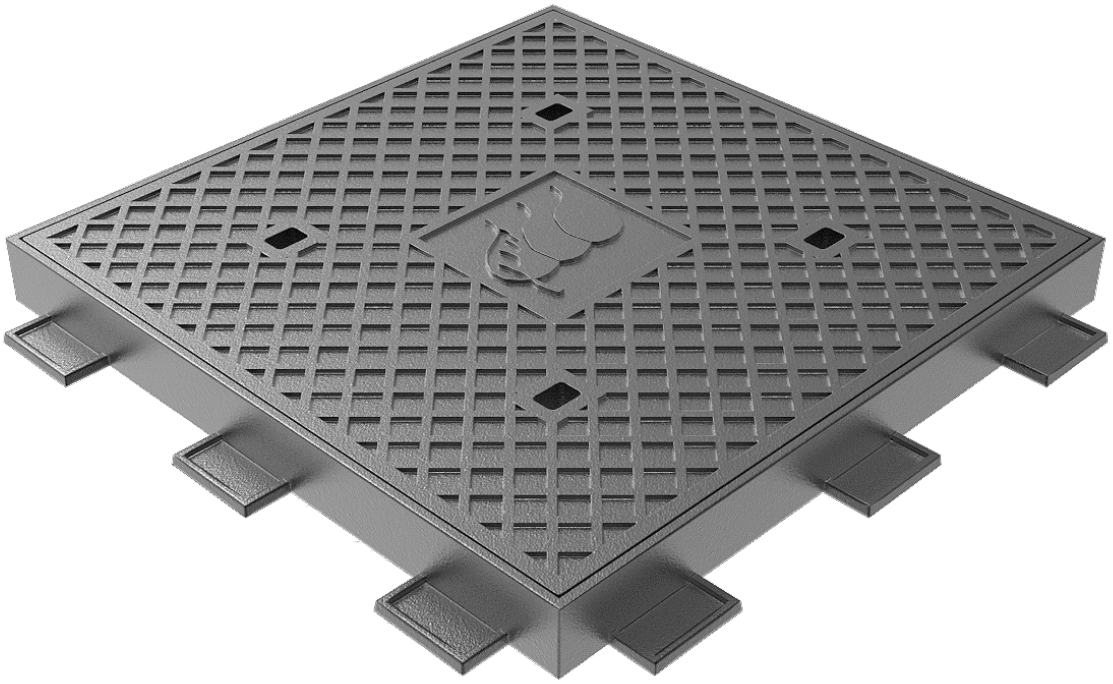

IBM3T3

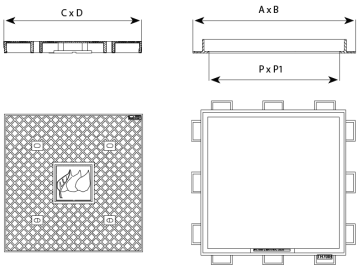

REF.		A	B	H	C	D	P	P1	UN.
IBM2T2 M2-T2	B-125	690	690	65	665	665	630	630	15

Made of ductile iron, in spheroidal graphite, according to ISO 1083 (Type 500-7) and EN 1563 standard

- Installation area: Class B-125 according to EN 124. Group 2. Sidewalks, pedestrian areas and similar surfaces, parking areas and multi-story car parks.
- Coating: Black water-soluble paint, non-toxic, non-flammable and non-polluting.
- Surface: Metal lid with non-slip texture.
- Stability: Lid with a notch for easy opening.
- Civil works: Hydraulic frame with tabs for better installation on site.

V. 2026-07-02 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.