




Designed to withstand medium traffic. Perfect for installation on roads with an ADT of 1,000-20,000, and in particular on road carriageways (including pedestrian streets), stabilised kerbstones and parking areas for all types of vehicles.

Complies with European standard EN-1433.

Metal non-slip surface.

Coated with non-toxic, non-flammable and environmentally safe black paint.

Optional : Fixing system between the channel and the grate.

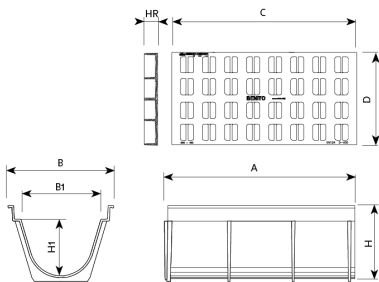

REF.	A	B	B1	H	H1	C	D	dm2	UN.
RC50 D400	980	550	415	395	300	980	490	16	10

**IMPORTANT:**

It is imperative to level the channels during their installation and Base like the side walls, a defective installation cancels all guarantee.