



UM304B
Bench


NeoBarcino




Controlled
logging




Graffiti
protector



Grey cast
iron



Hard
wood



M10 bolts
fixing




NEOBARCINO designer bench, total dimensions (length x height x depth) 655x1800x630 mm, made with ductile iron legs (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal corrosion resistance). Epoxy primer finish and hammered grey polyester powder paint. Six natural tropical wood planks (treated with a triple-layer Lignus coating, a fungicidal, insecticidal and water-repellent protector). Stainless steel hardware. Prepared for anchoring with M10 expansion bolts according to surface and project.


Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

GRAFUS anti-graffiti protection (optional): Material protector against paints and markings that not only protects urban furniture but also restores its initial appearance, enhancing and facilitating cleaning. Meets cleaning requirements according to ASTM D6578. Withstands multiple cleaning cycles. Excellent chemical resistance (solvents, acids, bases), scratch resistance, and yellowing resistance. Strong adhesion on various paint substrates.

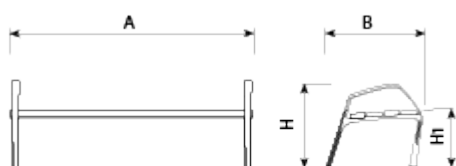

Ref.	A	B	H	H1
UM304N	1800	710	800	460
UM304NS	700	710	800	460
UM304NL	3000	710	800	460
UM304B	1800	630	655	460

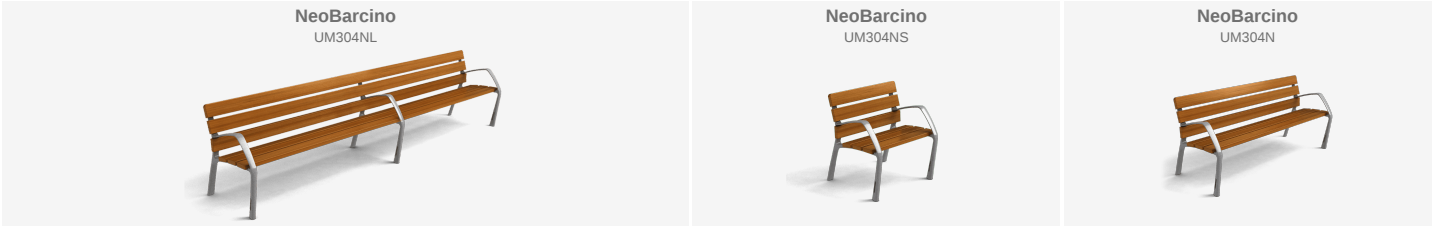

V. 2025-09-18 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.