




UM330  
Bench  
**Madrid**



**Bench MADRID, total dimensions (length x height x depth) 2000x840x655 mm, manufactured with feet and central reinforcement of 50 x 8mm steel plate (UM332: 50 x 10 in the legs and 50 x 16 mm in the Brackets ) with black baked polyester enamel (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal resistance to corrosion). Two natural tropical wood planks of 170 x 40 mm (UM332: 190 x 45 mm) in the seat and a 190 x 40 mm plank (UM332: 245 x 45 mm) in the backrest treated with a triple-layer Lignus coating, fungicidal, insecticidal and water-repellent protector). Stainless steel screws. Prepared for anchoring with M10 expansion bolts according to surface and project. Optional not included: Customizable marking with 74x35 mm aluminum plate or milled board.**

**Steel with FERRUS treatment:** an iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, and it involves an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.

**Hardwood treated with LIGNUS:** Wood from responsible forestry. Density greater than 930kg/m<sup>3</sup>, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

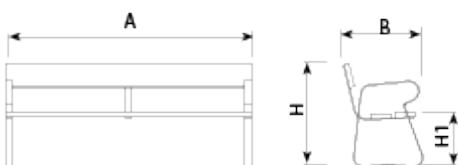

Ref.	A	B	H	1
UM330	2000	655	840	450
UM332	2000	655	750	390

