




UM362K-C
Bench

Ecosens




Aluminium
Grey



Inclusive
Product



Awarded
material



ReBnew
material



20 years
warranty



Low
maintenance



ECOSENS designer Bench, 1800mm long, with a sober and elegant design, total dimensions (length x height x depth) 1800x845x725 mm, manufactured with steel legs (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal corrosion resistance) in an aluminum gray finish, ReBnew profiles (BENITO's recycled polymer that is produced entirely from packaging from the yellow container and does not require any type of maintenance). It is not affected by humidity or corrosion. Stainless steel screws. Prepared for anchoring with M10 expansion bolts according to the surface and project.

Optional not included: Customizable marking with 74x35 mm aluminum plate.


ReBnew: 100% recycled polymer, sturdy and durable, derived from urban, industrial, and domestic waste... It is weather-resistant, resistant to oils, acids, and seawater. It does not splinter or crack, nor does it rot or dry out.

Irregular surface finish makes the board extremely durable as it effectively hides scratches caused by vandalism. Nevertheless, surface scratches can be repaired to restore it to a like-new condition.

Scratch Repair on ReBnew

AWARDED WITH "DER BLAUE ENGEL": Product with low environmental impact throughout its lifecycle. It is awarded to products that meet criteria for reducing environmental impact in manufacturing, recycling, packaging, use, emissions, collection, and disposal. In addition to environmental criteria, it includes quality, safety, energy consumption, and other considerations. It is one of the most prestigious labels globally.

Steel with FERRUS treatment: an iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, and it involves an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.

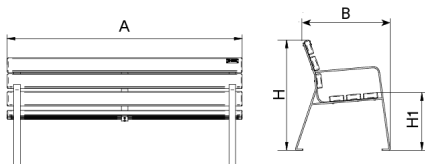

Ref.	A	B	C	H	H1
UM362K-C	1800	725	450	845	440

