

UM377SM

Chair

Quatro S

By Carles Casamor - Marta Gabàs © ® BENITO



Inclusive Product | Hard wood | Oxide Red Oxiron | M10 bolts fixing


ISO 9001 | ISO 50001 | ISO 14001 | ISO 45001

QUATRO S designer chair, total dimensions (length x height x depth) 620x795x665 mm, made with galvanized steel legs (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal corrosion resistance), with epoxy primer and a red oxide oxiron finish. Five natural tropical wood planks (treated with a triple-layer Lignus coating, a fungicidal, insecticidal and water-repellent protector). Stainless steel screws. Prepared for anchoring with M10 expansion bolts according to the surface and project.
Optional items not included: Customizable marking with 74x35 mm aluminum plate or milled board.

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

Steel with a hot-dip galvanizing treatment to protect it from corrosion. Our galvanizing process complies with the UNE EN ISO 1461:2009 standard and involves immersion in a crucible of molten zinc at 450°C, during which a reaction occurs between zinc and steel resulting in different layers of alloy between the two metals, culminating in an external coating of pure zinc. To ensure proper application of the process, it is essential to subject the pieces to a preliminary process of degreasing, pickling, and fluxing.

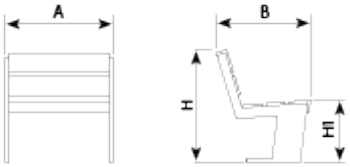

Ref.	A	B	H	H1
UM377X	2000	665	795	450
UM377SM	620	665	795	450

Quatro
UM377X



V. 2026-10-26 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

V. 2026-10-26 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.