



UM397E  
Bench

# Leman

By Compagnies Desrues © BENITO




**LEMAN design Bench**, total dimensions (length x height x depth) 1965x830x600 mm, manufactured with ductile iron legs (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal corrosion resistance). Epoxy primer finish and gray polyester powder paint. Tropical wood planks (treated with a triple-layer Lignus coating, a fungicidal, insecticidal, and water-repellent protector). Stainless steel hardware. Prepared for anchoring with M10 expansion bolts according to surface and project.

Optional items not included: Customizable marking with 74x35 mm aluminum plate.


**Ductile Iron treated with FERRUS:** iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

**Hardwood treated with LIGNUS:** Wood from responsible forestry. Density greater than 930kg/m<sup>3</sup>, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

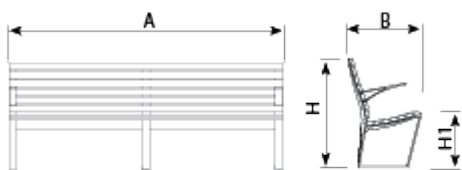

Ref.	A	B	H	H1
UM397E/UM397EAL*	1965	600	830	430
UM397BE/UM397BEAL*	1965	545	460	-
UM397SE/UM397SEAL*	565	600	830	430

Leman  
UM397BE



Leman  
UM397SE



